

PRODUCT SPECIFICATION



Part No. : JH-2835WB12P18-T10A-Q5-467.5
High Power LED


Catalog

| | |
|----------------------------|----|
| 1.Product Features | P2 |
| 2.Dimensions | P2 |
| 3.Absolute Maximum Rating | P3 |
| 4.Optical Character | P3 |
| 5.Optical Character Curves | P4 |
| 6.Spectrum Curves | P5 |
| 7.Viewing Angle Curves | P5 |
| 8.Tape&Reel Packing | P6 |
| 9.Soldering Advice | P7 |
| 10.Cautions | P8 |

1.Product Features


- High Brightness White LED
- Round Package
- Viewing Angle 120 Degree
- Chip Material: InGaN AlGaInP
- RoHS Compliant

2.Dimensions

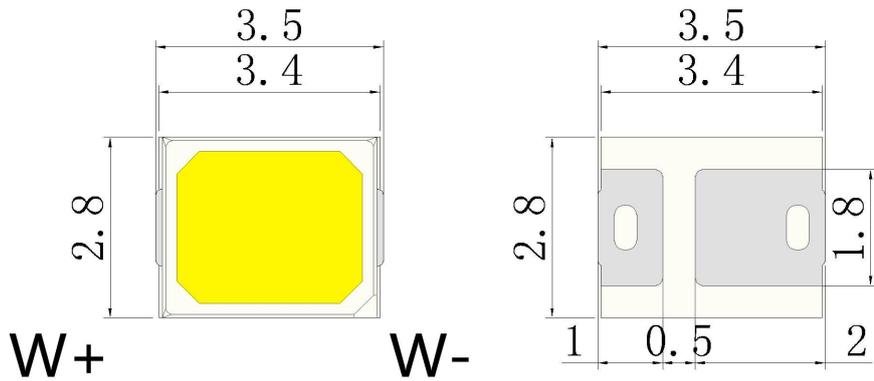


Top view


Bottom view

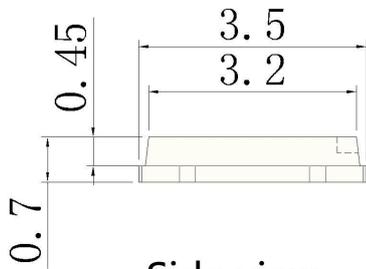

Side view



Perspective view

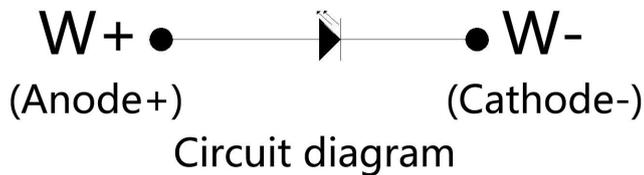

Notes:

1. All dimensions are in millimeters.
2. Tolerance is $\pm 0.1\text{mm}$ unless otherwise noted.

3. Absolute Maximum Rating @ Ta=25° C

| Parameter | Symbol | Maximum Rating | Unit |
|--|--------|-----------------|------|
| Continuous Forward Current | IF | 300 | mA |
| Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width) | IFp | 400 | mA |
| Reverse Voltage | VR | 5 | V |
| Power Dissipation | PD | 1 | W |
| Electrostatic Discharge | ESD | 1000 | V |
| Operating Temperature Range | TOPR | -25°C to +80°C | |
| Storage Temperature Range | TSTG | -35°C to +100°C | |
| Lead Soldering Temperature | TSOL | 260°C | |

4. 光学特征 @ Ta=25°C / Optical Character @ Ta=25° C





| Parameter | Symbol | Color | Min. | Typ. | Max. | Unit | Test Condition |
|---------------------------|---------|-------|------|------|------|------|----------------|
| Forward Voltage | VF | W | 2.8 | 2.9 | 3.0 | V | IF=150mA |
| Luminous Flux | Φ | W | 50 | 55 | 60 | LM | IF=150mA |
| Color Temperature | Tc | W | 4750 | 5000 | 5250 | K | IF=150mA |
| Color rendering index | Ra | W | 90 | | | / | IF=150mA |
| Reverse Current | IR | | 0 | | 1 | μA | VR=5V |
| Viewing Angle | 2θ1/2 | | | 120 | | deg | IF=150mA |
| Recommend Forward Current | IF(rec) | W | | | 150 | mA | |

Notes:


Measurement tolerance of forward voltage±0.1V

5. Optical Character Curves

(25 ° Ambient Temperature Unless Otherwise Noted)

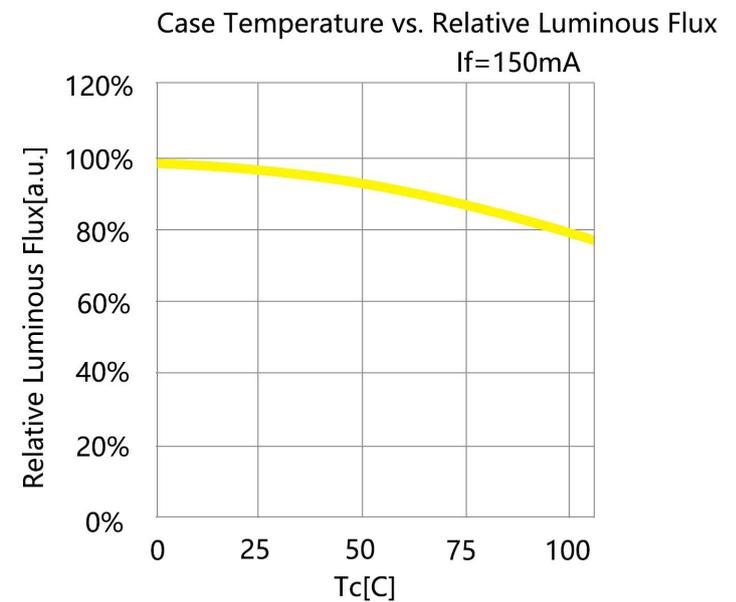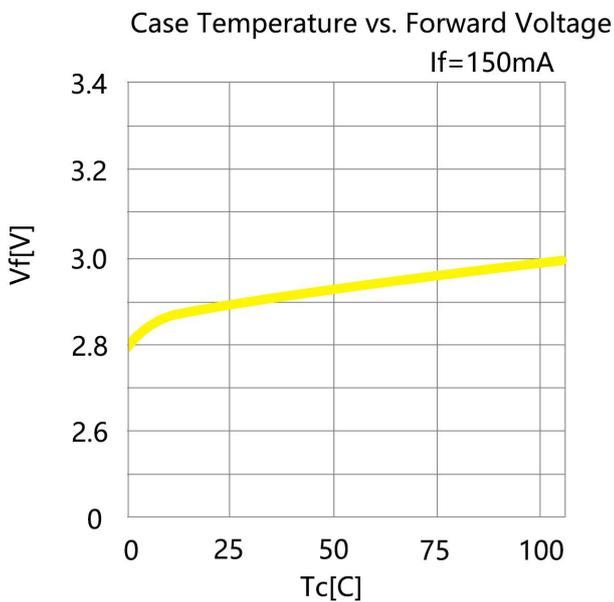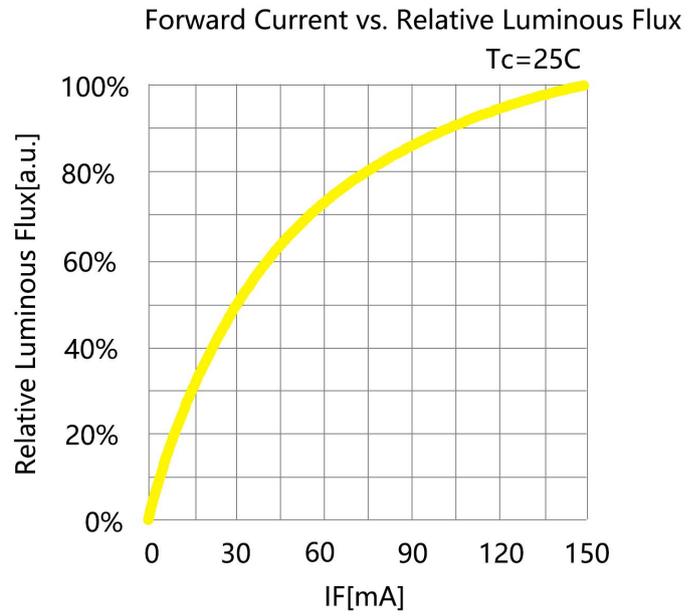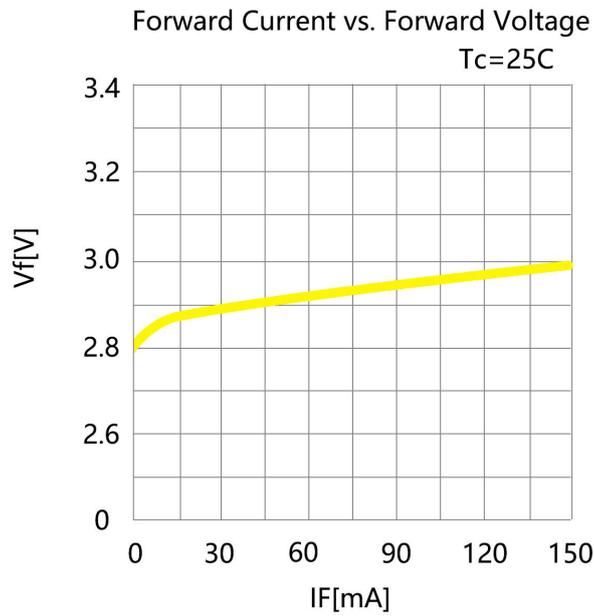


6. Spectrum Curves

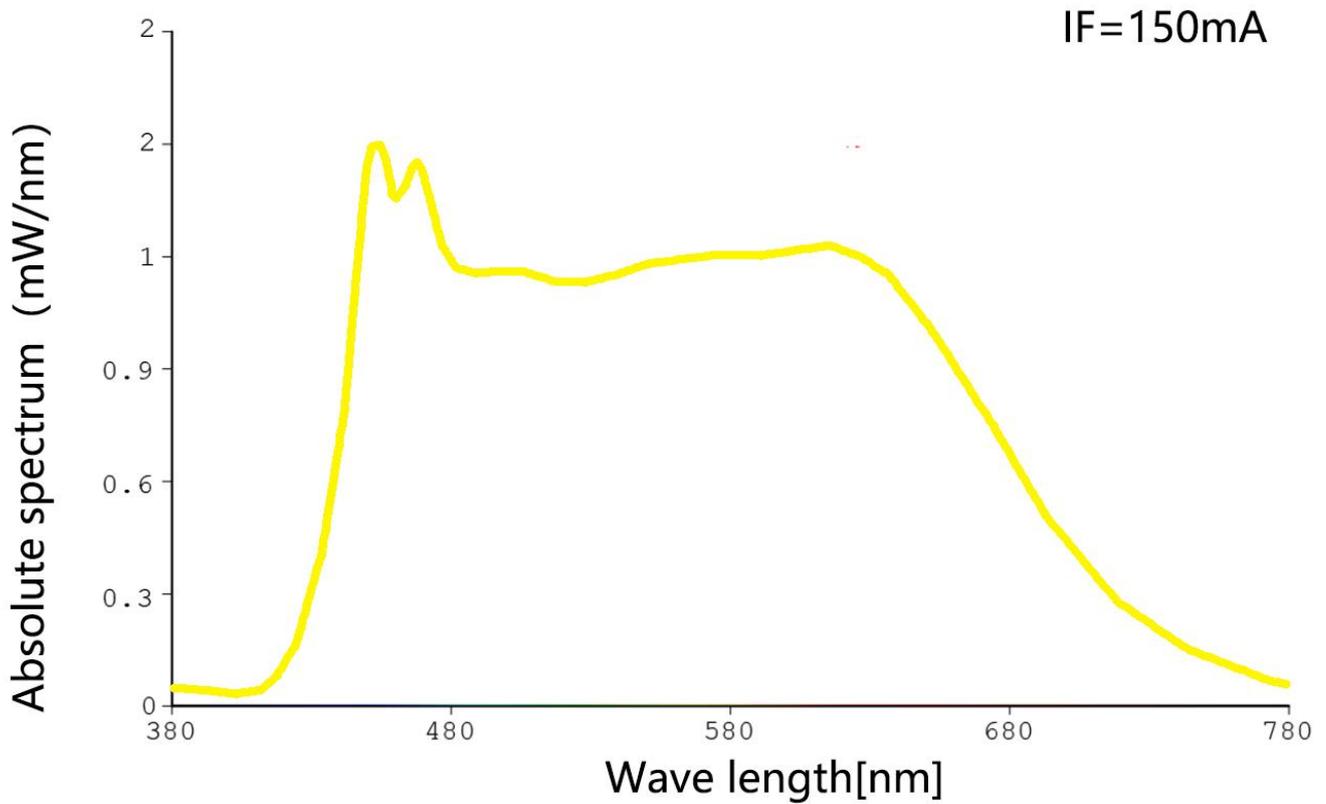

Radiation Characteristic


IF=150mA

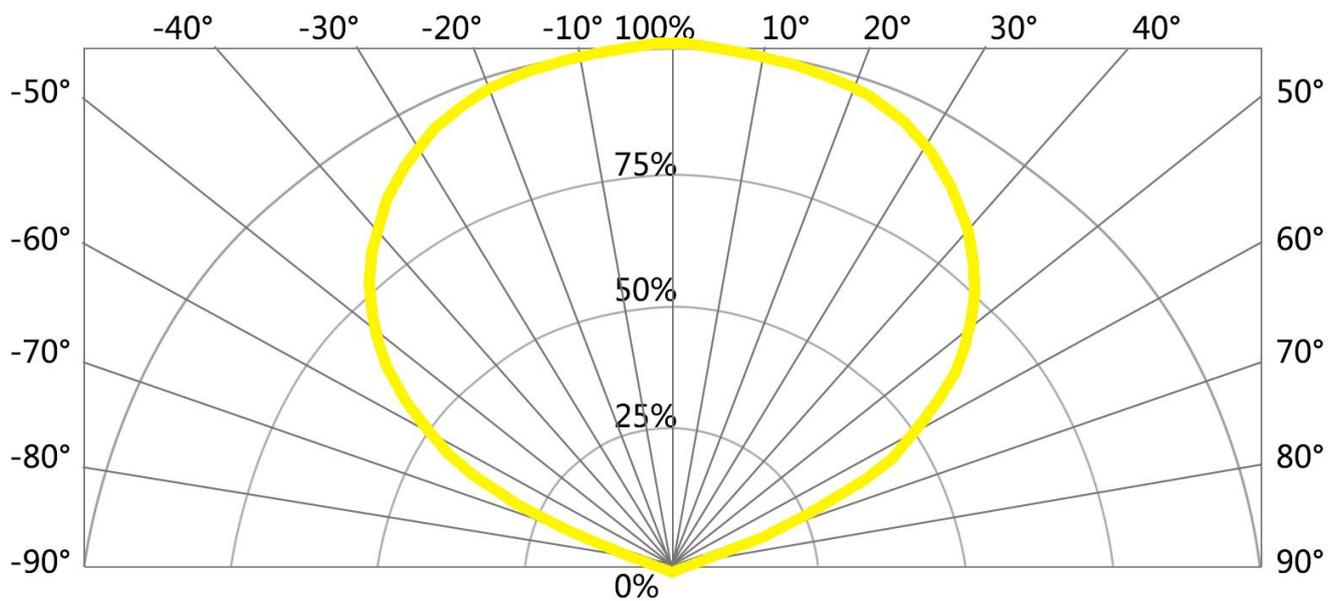

7. Viewing Angle Curves

9.Soldering Advice

1. When soldering, don't touch the LED appearance gel during, this bad operation will destroy the LED. Moding LED usually use reflow soldering, please refer to the following reflow temperature curve , and recommend the user follow the soldering temperature curve of the solder paste.

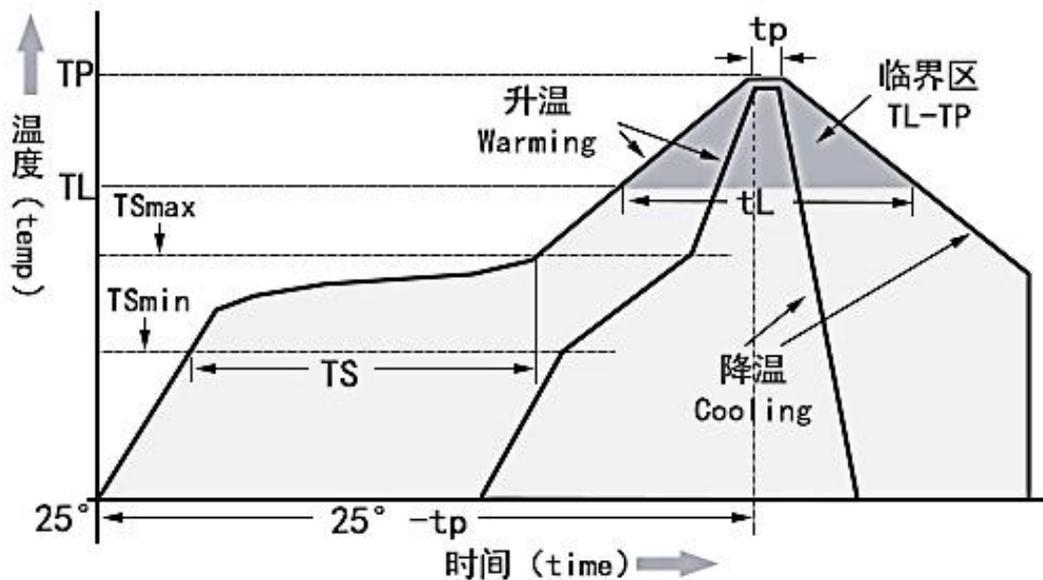

| Temperature Curve Character | Lead-free solder |
|---|----------------------------------|
| Average heating rate(TSmin to Tp) | 最高 3°C/秒 Top 3 °C / s |
| Preheating: Minimum temperature (TSmin) | 90°C |
| Preheating: Maximum temperature (TSmax) | 200°C |
| Preheating: Time (TSmin to TSmax) | 60-180 s |
| Duration above temperature: Temperature TL | 240°C |
| Duration above temperature: Time tL | 60-150 s |
| Peak/classification temperature (Tp) | 260°C |
| Time within 5°C of actual peak temperature (tp) | 20-40 s |
| Cooling speed | 最高 6°C/秒 The highest 6 °C / s |
| Time to reach peak temperature at 25°C | 最多 8 分钟 8 minutes Max |

10.Cautions


1. Electrostatic Treatment

Do a full range of anti-static measures (such as: anti-static ring, anti-static clothes, machine, equipment grounding wire, etc.)



2. Heat Dissipation

- A、 It is recommend to configure reasonable heat dissipation device for the product.
- B、 The best working temperature range of the product is 40-60°. It is recommended to control the working temperature of the product within a reasonable range.

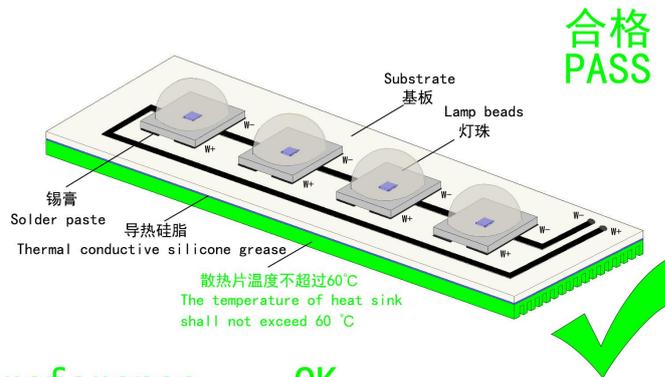

3. Installation Conditions

reference OK

- A、 Do not exert any pressure on the LED area during the use of the led beads. such as below:

