

PRODUCT SPECIFICATION



Part No. : JH-30WBVG14G45-J6C
High Power LED





Catalog

1. Product Features	P2
2. Dimensions	P2
3. Absolute Maximum Rating	P3
4. Optical Character	P3
5. Optical Character Curves	P4
6. Spectrum Curves	P5
7. Viewing Angle Curves	P5
8. Cautions	P6

1. Product Features

- High Brightness white LED
- Plane Package
- Viewing Angle 140 Degree
- Chip Material: InGaN
- RoHS Compliant

2. Dimensions

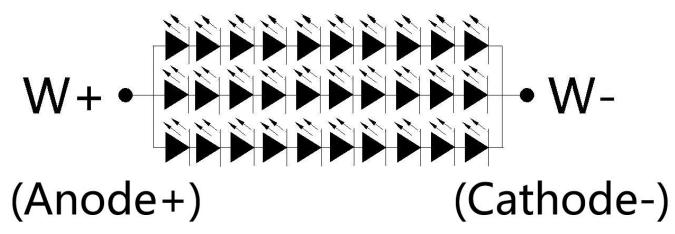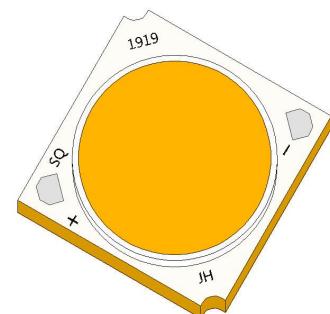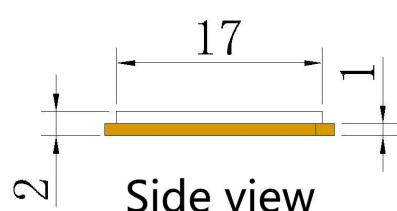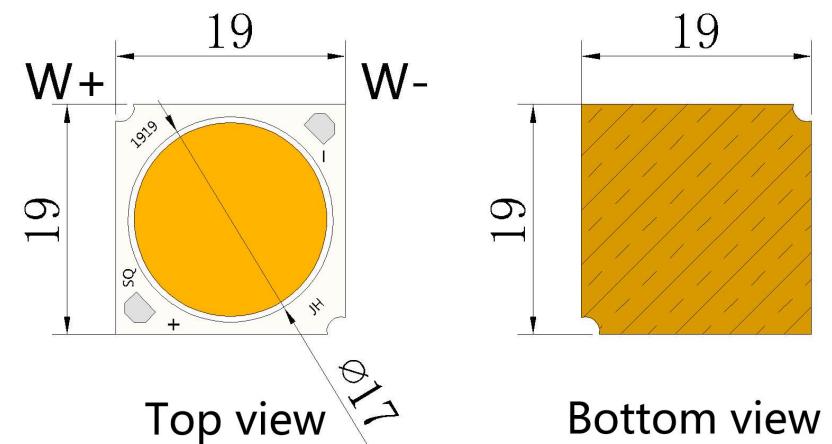

Circuit diagram

Notes:

1. All dimensions are in millimeters.
2. Tolerance is $\pm 0.1\text{mm}$ unless otherwise noted.

3. Absolute Maximum Rating @ Ta=25° C

Parameter	Symbol	Maximum Rating	Unit
Continuous Forward Current	IF	1050	mA
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	IFP	1200	mA
Reverse Voltage	VR	36	V
Power Dissipation	PD	30	W
Electrostatic Discharge	ESD	1000	V
Operating Temperature Range	TOPR	-25°C to +60°C	
Storage Temperature Range	TSTG	-35°C to +80°C	
Lead Soldering Temperature	TSOL	260°C	

4. 光学特征 @ Ta=25°C / Optical Character @ Ta=25° C





参数	符号	颜色	最小值	平均值	最大值	单元	测试条件
Forward Voltage	VF	W	30	31	32	V	I _F =1050mA
Luminous Flux	Φ	W	2000	2250	2500	Lm	I _F =1050mA
Chromaticity Coordinates	x			0.34		\	I _F =1050mA
	y			0.35		\	I _F =1050mA
Color Temperature	Tc			5000		K	I _F =1050mA
Reverse Current	IR		0		10	μA	V _R =36V
Color rendering index	Ra		95		98		I _F =1050mA
Viewing Angle	2θ1/2				140	deg	I _F =1050mA
Recommend Forward Current	IF(rec)	W			1050	mA	

Notes:


Measurement tolerance of forward voltage ±0.1V

5. Optical Character Curves


(25 ° Ambient Temperature Unless Otherwise Noted)

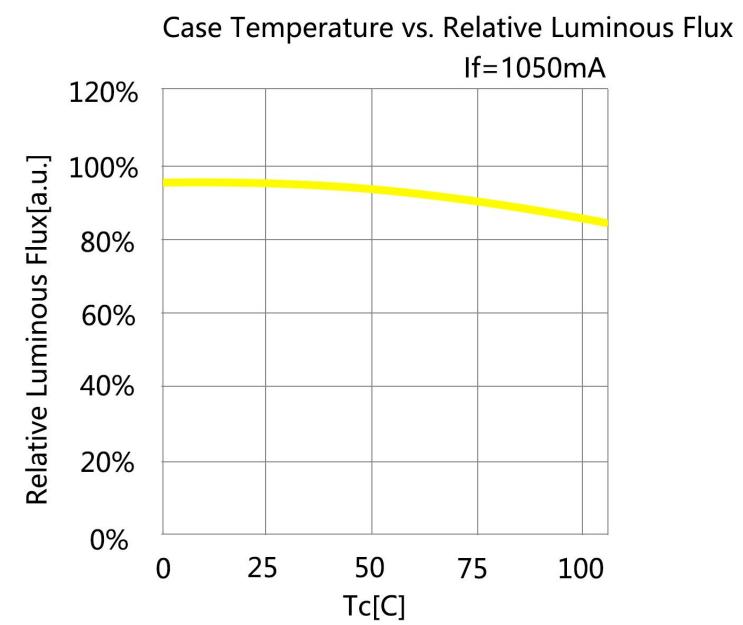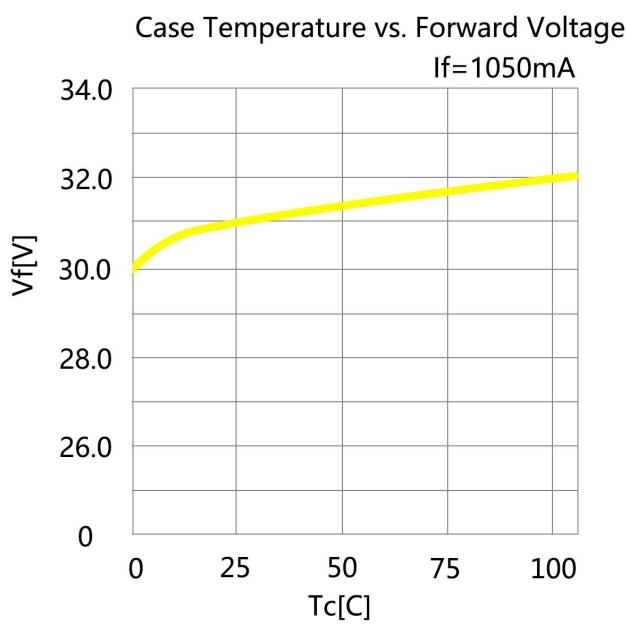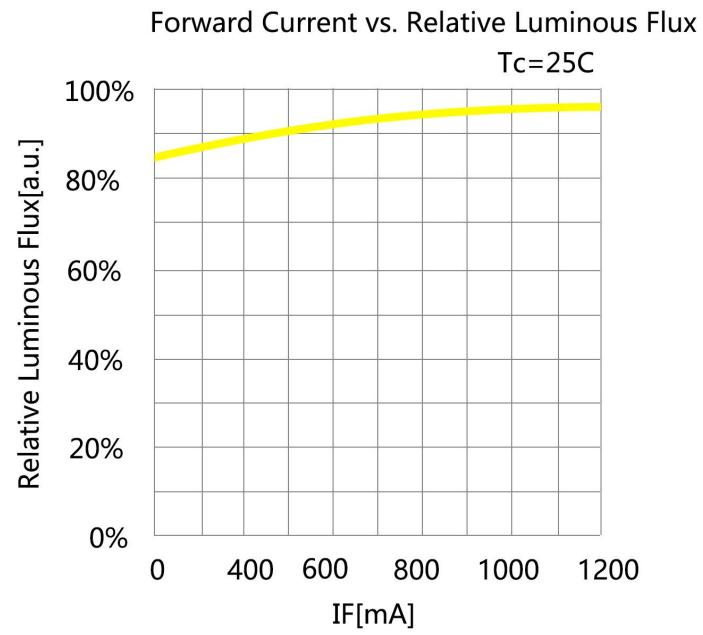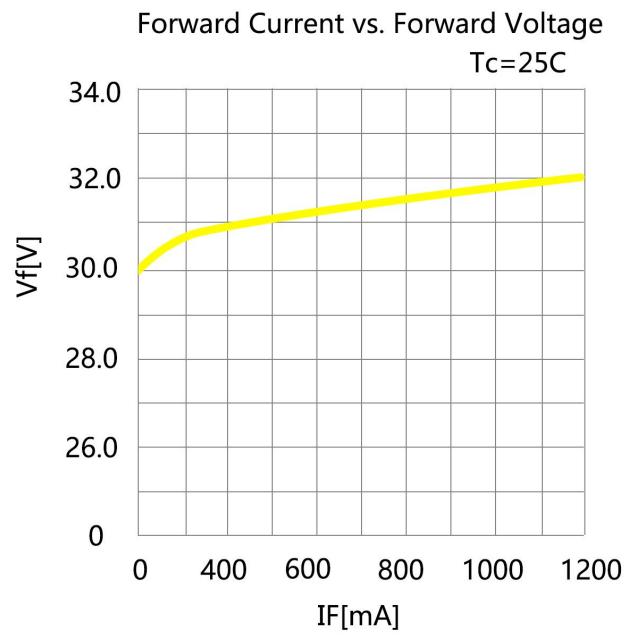

6. Spectrum Curves

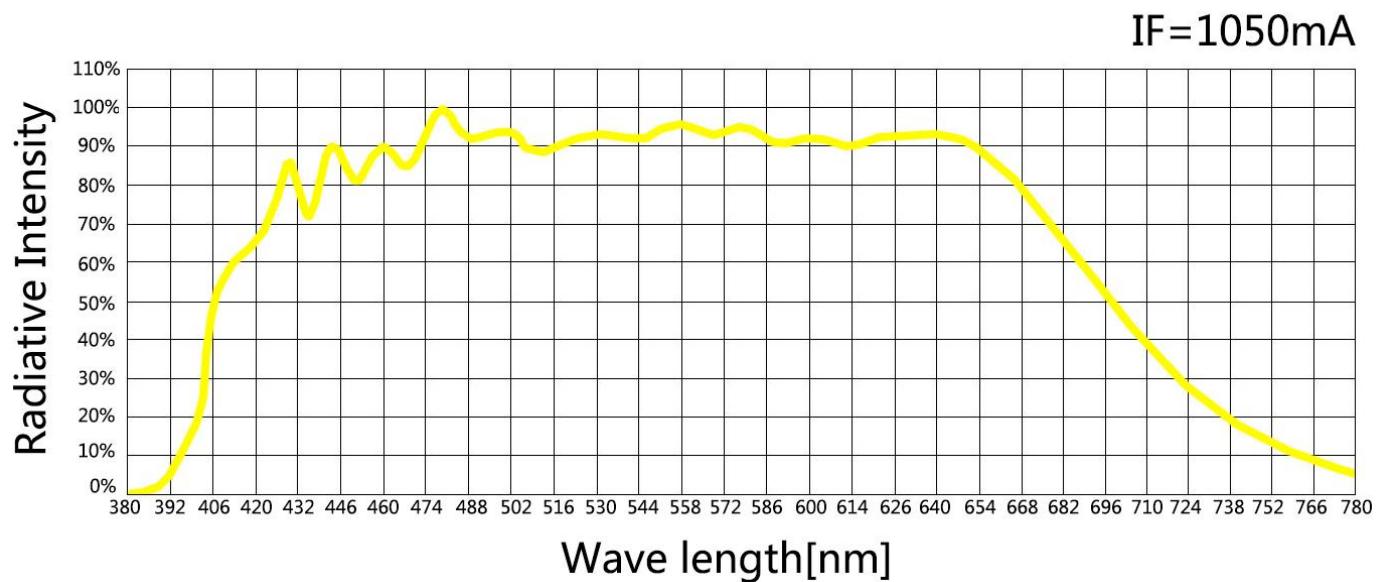

7. Viewing Angle Curves

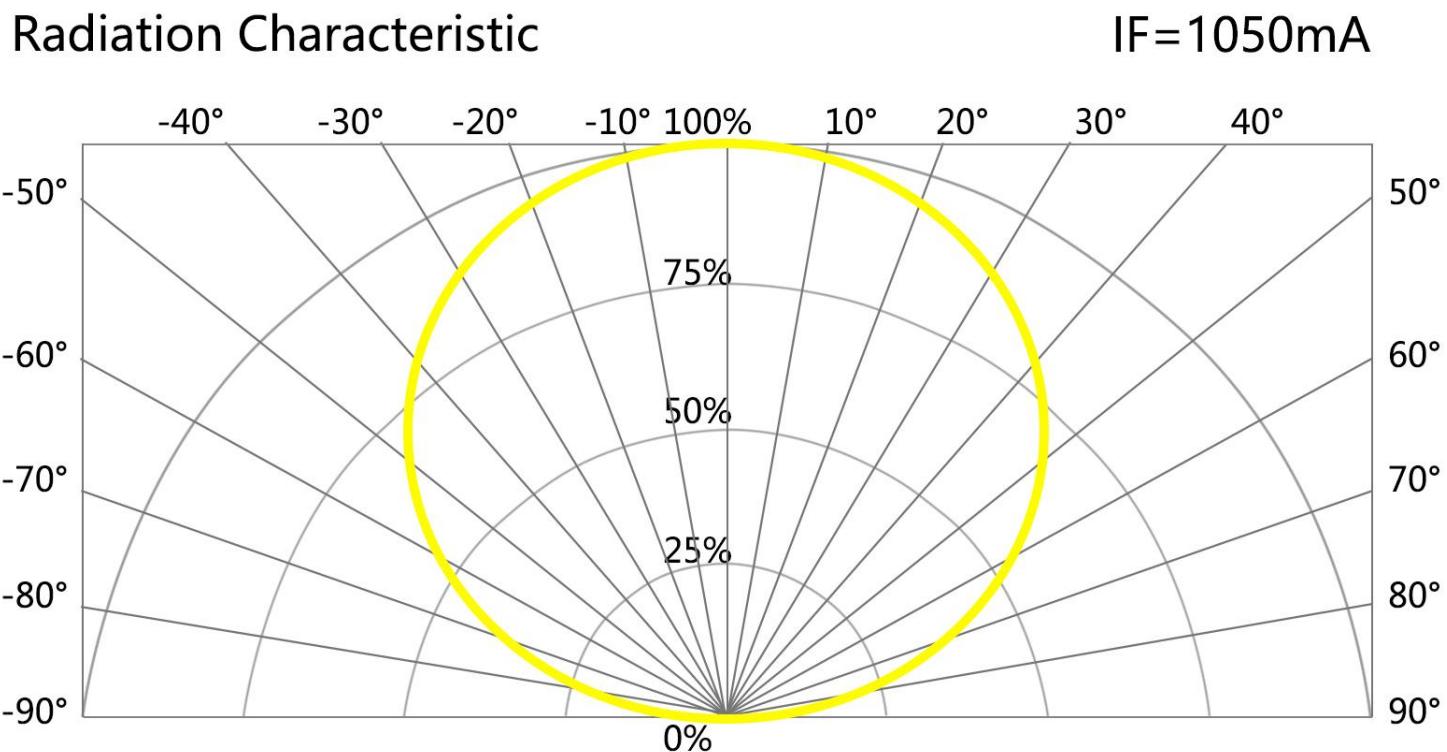

8.Cautions


1. Electrostatic Treatment

Do a full range of anti-static measures (such as: anti-static ring, anti-static clothes, machine, equipment grounding wire, etc.)



2. Heat Dissipation

- A、It is recommend to configure reasonable heat dissipation device for the product.
- B、The best working temperature range of the product is 40-60°. It is recommended to control the working temperature of the product within a reasonable range.

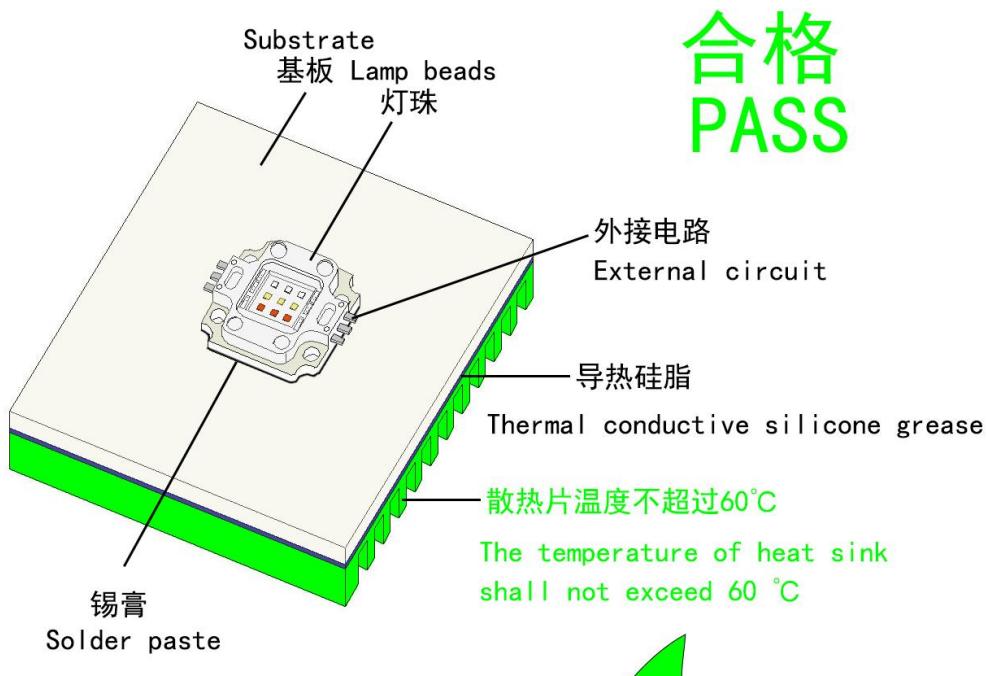

OK

